

FORM PTO-1390 (REV. 5-93)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER 10191/1716	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				U.S. APPLICATION NO. (If known, see 37 CFR 1.5)	
				09/762665	
INTERNATIONAL APPLICATION NO. PCT/DE00/00487		INTERNATIONAL FILING DATE (22.02.00) 22 February 2000		PRIORITY DATE CLAIMED (08.06.99) 08 June 1999	
TITLE OF INVENTION A FUEL INJECTOR AND A METHOD FOR MANUFACTURING IT					
APPLICANT(S) FOR DO/EO/US <b>Hans WALDEMAR and Johann BAYER</b>					
Applicants herewith submit to the United States Designated/Elected Office (DO/EO/US) the following items and other information					
1. <input checked="" type="checkbox"/> This is a <b>FIRST</b> submission of items concerning a filing under 35 U.S.C. 371. 2. <input type="checkbox"/> This is a <b>SECOND</b> or <b>SUBSEQUENT</b> submission of items concerning a filing under 35 U.S.C. 371. 3. <input checked="" type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1). 4. <input type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date. 5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)) a. <input type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau). b. <input checked="" type="checkbox"/> has been transmitted by the International Bureau. c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US) 6. <input checked="" type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)). 7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)) a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau). b. <input type="checkbox"/> have been transmitted by the International Bureau. c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. d. <input checked="" type="checkbox"/> have not been made and will not be made. 8. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)). 9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)) (unsigned). 10. <input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)). 					
Items 11. to 16. below concern other document(s) or information included:					
11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98. 12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included. 13. <input checked="" type="checkbox"/> A <b>FIRST</b> preliminary amendment. <input type="checkbox"/> A <b>SECOND</b> or <b>SUBSEQUENT</b> preliminary amendment. 14. <input type="checkbox"/> A substitute specification. 15. <input type="checkbox"/> A change of power of attorney and/or address letter. 16. <input checked="" type="checkbox"/> Other items or information: Translation of International Search Report and Form PCT/RO/101.					

Express Mail No.

8L302703172

17. ☒ The following fees are submitted:

CALCULATIONS | PTO USE ONLY

## \*Basic National Fee (37 CFR 1.492(a)(1)-(5)):

Search Report has been prepared by the EUROPEAN PATENT OFFICE or  
JPO ..... \$860.00

International preliminary examination fee paid to USPTO (37 CFR 1.482) ..... \$690.00

No international preliminary examination fee paid to USPTO (37 CFR 1.482) but  
international search fee paid to USPTO (37 CFR 1.445(a)(2)) ..... \$710.00Neither international preliminary examination fee (37 CFR 1.482) nor international search  
fee (37 CFR 1.445(a)(2)) paid to USPTO ..... \$1,000.00International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims  
satisfied provisions of PCT Article 33(2)-(4) ..... \$100.00

ENTER APPROPRIATE BASIC FEE AMOUNT = \$ 860

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30 months  
from the earliest claimed priority date (37 CFR 1.492(e)).

\$

Claims	Number Filed	Number Extra	Rate		
Total Claims	20 - 20 =	0	X \$18.00	\$ 0	
Independent Claims	4 - 3 =	1	X \$80.00	\$ 80	
Multiple dependent claim(s) (if applicable)			+ \$270.00	\$	

TOTAL OF ABOVE CALCULATIONS = \$ 940

Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity statement must  
also be filed. (Note 37 CFR 1.9, 1.27, 1.28).

\$

SUBTOTAL = \$ 940

Processing fee of \$130.00 for furnishing the English translation later the ☐ 20 ☐ 30  
months from the earliest claimed priority date (37 CFR 1.492(f)).

+

\$

TOTAL NATIONAL FEE = \$ 940

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be  
accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property

+

\$

TOTAL FEES ENCLOSED = \$ 940

Amount to be:  
refunded \$  
charged \$

- a. ☐ A check in the amount of \$ \_\_\_\_\_ to cover the above fees is enclosed.
- b. ☒ Please charge my Deposit Account No. 11-0600 in the amount of **\$940.00** to cover the above fees. A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 11-0600. A duplicate copy of this sheet is enclosed.

**NOTE:** Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SIGNATURE

Richard L. Mayer, Reg. No. 22,490

NAME

DATE

SEND ALL CORRESPONDENCE TO.  
Kenyon & Kenyon  
One Broadway  
New York, New York 10004By: Richard L. Mayer (Reg. No. 41,172)  
Richard L. Mayer  
2/8/01

09/762665

JC02 Rec'd PCT/PTO 09 FEB 2001

[10191/1716]

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

Applicant(s) : WALDEMAR et al.  
Serial No. : To Be Assigned  
Filed : Herewith  
For : A FUEL INJECTOR AND A METHOD  
FOR MANUFACTURING IT  
Examiner : To Be Assigned  
Group Art Unit : To Be Assigned

Assistant Commissioner  
for Patents  
Washington, D.C. 20231

**PRELIMINARY AMENDMENT**

SIR:

Please amend the above-identified application before examination as follows:

**In The Specification:**

On page 1, line 1, change "Background Information" to  
--Field of the Invention--.

On page 1, line 2, delete "according to species of Claims 1 and 3".

On page 1, line 4, insert --Background Information--.

On page 1, line 5, delete "From".

On page 1, line 5, change "35 40 660 C2," to --No. 35 40 660  
describes--.

On page 1, line 5, delete "is known".

EL302703/72

09/762665-044801

On page 1, line 26, delete "From".

On page 1, line 26, change "Patent 196 26 576 A1," to --Published Patent Application No. 196 26 576 describes--.

On page 1, line 26, delete "is known".

On page 2, line 3, change "Advantages of the Invention" to --Summary Of The Invention--.

On page 2, line 5, delete "having the characterizing".

On page 2, line 6, delete "features of Claim 1 or of Claim 3".

On page 2, delete lines 11-12.

On page 2, line 31, delete ", having the features of Claim 9".

On page 2, line 32, delete "or of Claim 10,".

On page 3, delete lines 1-2.

On page 3, delete lines 18-33, and in their place insert:

--Brief Description Of The Drawings

Figure 1 depicts an axial cutaway view of a first exemplary embodiment of a fuel injector according to the present invention.

Figure 2 depicts the cutaway portion II in Figure 1, before the production of the crimping connection.

FOBTD" 59929/60

Figure 3 depicts the cutaway portion II in Figure 1, after the production of the crimping connection.

Figure 4 depicts a partial axial cutaway view of the second exemplary embodiment of the fuel injector according to the present invention before the production of the crimping connection.

Figure 5 depicts the exemplary embodiment presented in Figure 4, after the production of the crimping connection.

Figure 6 depicts a partial axial cutaway view of the third exemplary embodiment of a fuel injector according to the present invention, before the production of the crimping connection.

Figure 7 depicts the exemplary embodiment presented in Figure 6, after the production of the crimping connection.

Figure 8 depicts a cutaway view along the line VIII-VIII in Figure 7.

Detailed Description--.

On page 4, delete lines 1-16.

On page 4, line 29, after “the” insert --present--.

On page 10, line 1, change “Patent Claims” to  
--What Is Claimed Is:--.

**In The Claims:**

Please cancel claims 1-13, without prejudice, and add new claims 14-33 as follows:

14. (New) A fuel injector, comprising:  
a valve needle;  
a fixed valve seat surface;  
a valve-closure member that is actuated by the valve needle;  
a valve-closure member cooperating with the fixed valve seat surface to form a sealing seat;  
a connecting piece; and  
a valve housing that at least partially encloses the connecting piece, the valve housing being joined to the connecting piece by a crimped connection, wherein:  
the connecting piece includes at least one notch, and  
the valve housing, under an axial stress, is crimped into the at least one notch.
15. (New) The fuel injector according to claim 14, wherein:  
the fuel injector corresponds to an injector for a fuel injection system of an internal combustion engine.
16. (New) The fuel injector according to claim 14, wherein:  
the at least one notch is configured as a circumferential groove on an external periphery of the connecting piece.
17. (New) A fuel injector, comprising:  
a valve needle;  
a fixed valve seat surface;  
a valve-closure member that is actuated by the valve needle;  
a valve-closure member cooperating with the fixed valve seat surface to form a sealing seat;  
a connecting piece;  
a valve housing that at least partially encloses the connecting piece, the valve housing being joined to the connecting piece by a crimping connection; and

a spring element provided between the valve housing and the connecting piece and for acting upon the crimping connection through an axial stressing force.

18. (New) The fuel injector according to claim 17, wherein:  
the fuel injector corresponds to an injector for a fuel injection system of an internal combustion engine.
19. (New) The fuel injector according to claim 17, further comprising:  
a crimped valve housing segment; and  
a support ring provided between the spring element and the crimped valve housing segment.
20. (New) The fuel injector according to claim 17, wherein:  
the spring element includes a spring ring.
21. (New) The fuel injector according to claim 14, wherein:  
the crimped connection includes a plurality of crimping segments arranged with respect to a valve axis so as to be offset from each other circumferentially, and  
the valve housing is joined with respect to the crimping segments to the connecting piece in each case by a partial crimped connection, leaving out uncrimped segments.
22. (New) The fuel injector according to claim 17, wherein:  
the crimping connection includes a plurality of crimping segments arranged with respect to a valve axis so as to be offset from each other circumferentially, and  
the valve housing is joined with respect to the crimping segments to the connecting piece in each case by a partial crimped connection, leaving out uncrimped segments.

23. (New) The fuel injector according to claim 14, further comprising:  
a lift-adjustment disk arranged between the valve housing and the connecting piece.
24. (New) The fuel injector according to claim 17, further comprising:  
a lift-adjustment disk arranged between the valve housing and the connecting piece.
25. (New) The fuel injector according to claim 14, further comprising:  
a sealing ring arranged between the valve housing and the connecting piece.
26. (New) The fuel injector according to claim 17, further comprising:  
a sealing ring arranged between the valve housing and the connecting piece.
27. (New) A method for manufacturing a fuel injector that includes a valve-closure member actuated by a valve needle and cooperating with a fixed valve seat surface to form a sealing seat, that includes a connecting piece and a valve housing that at least partially encloses the connecting piece, and in which the connecting piece includes at least one notch into which the valve housing is crimped, the method comprising the steps of:  
inserting the connecting piece into the valve housing up to a predetermined limit stop; and  
crimping a material bulge into the at least one notch, wherein:  
the material bulge is arranged at an average distance with respect to the at least one notch in order to generate an axial tension between the valve housing and the connecting piece.



28. (New) The method according to claim 27, wherein:  
the fuel injector corresponds to an injector for a fuel injection system of an internal combustion engine.
29. (New) A method for manufacturing a fuel injector that includes a valve-closure member actuated by a valve needle and cooperating with a fixed valve seat surface to form a sealing seat, and that includes a connecting piece and a valve housing that at least partially encloses the connecting piece, the method comprising the steps of:  
inserting the connecting piece into the valve housing up to a predetermined limit stop;  
introducing a spring element into an interstitial space formed between the connecting piece and the valve housing; and  
applying a crimping force to the spring element by crimping over the valve housing in a direction of the connecting piece in order to generate an axial tension between the valve housing and the connecting piece.
30. (New) The method according to claim 29, wherein:  
the fuel injector corresponds to an injector for a fuel injection system of an internal combustion engine.
31. (New) The method according to claim 29 wherein, once the spring element is introduced, the method further comprises the step of:  
inserting a support ring into the interstitial space formed, after a joining, between the connecting piece and the valve housing.
32. (New) The method according to claim 29, further comprising the step of:  
prestressing the spring element before a crimping by an action of a tubular prestressing tool guided about the connecting piece.

33. (New) The method according to claim 29, further comprising the step of:  
 setting an axial insertion depth of the connecting piece into the valve housing  
 by at least one lift-adjustment disk.

**In The Abstract:**

On page 13, delete the Abstract and in its place insert the following:

**--Abstract Of The Disclosure**

A fuel injector, in particular an injector for fuel injection systems of internal combustion engines, has a valve-closure member that is actuated by a valve needle, the valve-closure member cooperating with a valve seat surface provided on a valve seat support to form a sealing seat, and a valve housing partially surrounding the valve seat support, the valve housing being joined to the valve seat support by a crimping connection. In this context, the valve seat support, axially stressed, is crimped to the valve housing.--.

**Remarks**

This Preliminary Amendment cancels claims 1-13, without prejudice, in the underlying PCT Application No. PCT/DE00/00487, and adds new claims 14-33. The new claims do not add new matter to the application but do conform the claims to U.S. Patent and Trademark Office rules.

The amendments to the specification and abstract are to conform the specification and abstract to U.S. Patent and Trademark Office rules. The amendments to the specification and abstract do not introduce new matter into the application.

The underlying PCT application includes a Search Report dated June 20, 2000, a copy of which is submitted herewith.

09763665 044304  
T0340 9929/60

Applicants assert that the present invention is new, non-obvious, and useful. Consideration and allowance of the claims are requested.

Respectfully submitted,

KENYON & KENYON

By: *Do Ingent (Reg. No. 41,172)*

Dated: *2/8/01*

By: *Richard L. Mayer*  
Richard L. Mayer  
Reg. No. 22,490

One Broadway  
New York, NY 10004  
(212) 425-7200

09763666 044804

3/PRTS

09/762665

JC02 Rec'd PCT/PTO 09 FEB 2001

[10191/1716]

## A FUEL INJECTOR AND A METHOD FOR MANUFACTURING IT

### Background Information

The present invention relates to a fuel injector according to species of Claims 1 and 3.

5 From German Patent 35 40 660 C2, an electromagnetically actuatable fuel injector is known having a valve housing, which, over a segment, surrounds a fuel intake feed pipe and a valve seat support. The valve seat support has a valve seat surface, which cooperates with a valve-closure member that can be actuated by a valve needle, so as to form a sealing seat. For achieving a necessary fuel quantity apportioned in the open-valve state between the valve-closure member and the valve seat surface, a desirable valve lift is set by interposing a lift-adjustment disk in the axial direction between a limit-stop plate and an end face of the valve seat support. After the setting is accomplished, the valve housing and the valve seat support are joined to each other, in that an end segment of a cylindrical retaining segment of the valve housing is crimped over the valve seat support.

However, this design has the following disadvantages:

Since the crimping force occurring as a result of the crimping can only be approximately specified by the crimping process, in that the end segment of the cylindrical retaining segment of the valve housing is crimped over the valve seat support, the tension generated between the valve seat support and the valve housing cannot be specified. In addition, the crimping is achieved by a plastic deformation of the end segment of the cylindrical retaining segment of the valve housing, the deformation being subject to aging, as a result of which the joining strength deteriorates between the valve housing and the valve seat support.

From German Patent 196 26 576 A1, a fuel injector is known in which the valve housing is joined to the valve seat support, in an alternative manner with respect to the above solution, via a screw connection. However, this solution is significantly more expensive because the additional screw element must be introduced, requiring for this purpose that a suitable thread be cut in the valve housing. Furthermore, introducing and tightening the screw element, from

the production-technical point of view, is an expensive and time-consuming production step.

#### Advantages of the Invention

5 In contrast, the fuel injector according to the present invention having the characterizing features of Claim 1 or of Claim 3 has the advantage that the axial tension between the valve housing and the valve seat support can be prespecified, and the manufacturing process of the connection can take place in simple and cost-effective production steps. In addition, the connection is age-resistant, thus increasing the service life of the fuel injector.

10 As a result of the measures indicated in the Claims 2 and 4 through 8, advantageous refinements of the fuel injector indicated in Claim 1 or Claim 3 are possible.

15 In an advantageous manner, a notch is configured as a circumferential groove on a lateral surface of the valve seat support, providing high strength for the crimping connection. In addition, a cost-effective manufacturing process of the notch results.

20 Advantageously, between the spring element and the crimped valve housing a support ring is provided. As a result, a uniform transmission of force from the crimping connection to the spring element is assured, and also the spring element is protected from external influences.

25 In an advantageous way, the crimping connection has a plurality of crimping segments, which are arranged so as to be offset circumferentially with respect to each other with regard to a valve axis, and at which the valve housing is joined to the valve seat support in a crimped partial connection, leaving out the uncrimped segments. As a result, the production of the crimping connection can be further simplified.

30 In an advantageous manner, a lift-adjustment disk is provided between the valve housing and the valve seat support. Using the lift-adjustment disk, the lift of the valve needle can be set.

The manufacturing method according to the present invention, having the features of Claim 9 or of Claim 10, has the advantage of being executable so as to be cost-effective and capable of being automated.

As a result of the measures indicated in the Claims 11 through 13, advantageous refinements of the method indicated in Claim 9 or 10 are possible.

It is advantageous that after introducing the spring element, a support ring is inserted into the interstitial space formed after they have been joined, between the valve seat support and the valve housing. As a result, the spring element can be deformed more simply and stressed more uniformly.

In an advantageous manner, the spring element is prestressed by the action of a tubular prestressing tool that is guided around the valve seat support. A significantly simplified production sequence results from using the prestressing tool.

It is advantageous that the axial insertion depth of the valve seat support into the valve housing is set by a lift-adjustment disk 4, adjusting the lift of the valve needle. As a result, any difference between the valve needle length of the valve needle and a setpoint length can be compensated for.

#### Drawing

Exemplary embodiments of the present invention are depicted in simplified form in the drawing and are discussed in greater detail in the subsequent description. The following are the contents:

Figure 1 depicts an axial cutaway view of a first exemplary embodiment of a fuel injector according to the present invention;

Figure 2 depicts the cutaway portion II in Figure 1, before the production of the crimping connection;

Figure 3 depicts the cutaway portion II in Figure 1, after the production of the crimping connection;

Figure 4 depicts a partial axial cutaway view of the second exemplary embodiment of

the fuel injector according to the present invention before the production of the crimping connection;

Figure 5 depicts the exemplary embodiment presented in Figure 4, after the production of the crimping connection;

Figure 6 depicts a partial axial cutaway view of the third exemplary embodiment of a fuel injector according to the present invention, before the production of the crimping connection;

Figure 7 depicts the exemplary embodiment presented in Figure 6, after the production of the crimping connection; and

Figure 8 depicts a cutaway view along the line VIII-VIII in Figure 7.

#### Description of the Exemplary Embodiments

Figure 1, in a partial axial cutaway representation, shows a fuel injector 100. Fuel injector 100 is designed here as a fuel injector 100 that opens to the inside. Fuel injector 100 functions in particular for the direct injection of fuel, in particular of gasoline, into a combustion chamber of a mixture-compressing internal combustion engine having externally supplied ignition, as a so-called fuel injector. However, fuel injector 100 according to the present invention is also suitable for other application cases.

Fuel injector 100 has a tubular connecting piece in the form of a valve seat support 1 having a spray-discharge opening 2. Spray-discharge opening 2, introduced into a cylinder head of the internal combustion engine, is sealed to the outside by a sealing ring 3. In place of a valve seat support 1, other connecting pieces, partially forming the housing of the valve, are conceivable, which in accordance with the invention are permanently joined to a valve housing 20 by crimping.

Valve seat support 1 has an axial longitudinal bore hole 4, which receives an axially movable valve needle 5. On valve seat support 1, a valve seat surface 6 is formed, which cooperates

with a truncated-cone-shaped, downstream-tapering valve-closure member 7 of valve needle 5, creating a sealing seat. In the depicted exemplary embodiment, valve-closure member 7 is formed as one piece with valve needle 5. As an alternative to the embodiment depicted, valve seat surface 6 can also be formed on a separate valve seat member, which is received by valve seat support 1 and is joined to it.

On the other side of valve-closure member 7 facing away from the sealing seat, valve needle 5 has a cylindrical segment 8, on whose lateral surface one or more spiral-shaped swirl grooves 9 are provided. Swirl grooves 9 are enclosed in the radial direction by valve seat support 1, surrounding cylindrical segment 8, and they extend from a fuel chamber 10, which is a part of axial longitudinal bore hole 4 of valve seat support 1, to a dosing point 11 in the area of valve seat surface 6. Due to swirl grooves 9, a swirl flow is generated that promotes the turbulence and therefore the atomization of the fuel.

Fuel chamber 10 is bordered on the upstream side by a guide segment 12 and is connected via outlet openings 13 to an axial cavity 14, which penetrates the intake-side area of valve needle 5. At its end opposite valve-closure member 7, valve needle 5 is connected to an armature 15. Armature 15 cooperates with a solenoid coil 16 to close and open fuel injector 100. A coil shell 17, having steps in the radial direction, receives the winding of solenoid coil 16. Stepped coil shell 17 surrounds a core 18, that acts as the internal pole, and, in a step having a larger diameter, surrounds, at least partially axially, a non-magnetic intermediate part 19. Both armature 15 as well as core 18 and external valve housing 20 are made of a ferromagnetic material. A closed magnetic flux circuit is formed by core 18, armature 15, and valve housing 20, armature 15 being pulled in the direction of core 18 in response to the electrical excitation of solenoid coil 16. In this way, valve needle 5 is moved in opposition to the restoring force generated by a resetting spring 21, resulting in the opening of the fuel injector. Resetting spring 21, in this context, is supported on a support plate 25.

A supply cable 22 provides for the electrical power supply of solenoid coil 16 and is connected to valve housing 20 by a cable receptacle 23. In the opened state of fuel injector 100, armature 15, in an armature stop face 33, strikes against the end face of core 18 facing the spray-discharge direction 2.



Valve seat support 1 has a notch 40 in the form of a circumferential groove, into which valve housing 20 is crimped, as a result of which valve housing 20 is axially braced against valve seat support 1. Notch 40, in this context, is situated on the external periphery of valve seat support 1 in an area in which valve housing 20 contacts a lower end area. Valve seat support 1 has a further circumferential groove 41, into which a sealing ring 42 is inserted. Sealing ring 42 at a surface 43 formed on valve housing 20 is pressed into circumferential groove 41, to seal the interior of fuel injector 100 against the external space.

In order to adjust the lift of valve needle 5, a lift-adjustment disk 46 is provided between a stop surface 45 formed on a limit stop 44 and support plate 25, the axial insertion depth of valve seat support 1 into the valve housing 20 being set by lift-adjustment disk 46.

Core 18 of fuel injector 100 has a fuel feed pipe 50, in which an internal screw thread 51 is configured. Fuel is supplied via a fuel hose 52, which via a screw element 53 is screwed into internal screw thread 51 of fuel feed pipe 50. To seal the screw connection, a sealing element 54 is provided between screw element 53 and fuel feed pipe 50, the sealing element being made of a fuel-resistant material.

The crimping connection depicted in Figure 1 between the valve housing 20 and valve seat support 1 and alternative embodiments of the same are described on the basis of the following Figures.

Figure 2 in a cutaway representation depicts the segment designated in Figure 1 as II. To set a valve needle lift of valve needle 5, lift-adjustment disk 46 is introduced into valve housing 20. Lift-adjustment disk 46, in this context, contacts stop surface 45 of limit stop 44. Sealing ring 42 is introduced into circumferential groove 41 of valve seat support 1, the sealing ring in this exemplary embodiment having a cross-sectional surface adjusted to groove 41. Valve seat support 1 is inserted into valve housing 20, valve seat support 1 contacting stop surface 45 of limit stop 44 via support plate 25 and lift-adjustment disk 46. Valve housing 20 has a material bulge 70 located radially to the outside, which has an average axial distance  $d$  from circumferential notch 40 formed in valve seat support 1.

To form the crimping connection, an external surface 71 of material bulge 70 is impacted by

a suitable, e.g., tubular crimping tool, so that valve housing 20 is deformed in a plastic manner, and according to Figure 3, a projection 73, nose-shaped in cross-section, results in the area of an inner surface 72 of valve housing 20 formed over circumferential notch 40.

5      Nose-shaped projection 73, depicted in Figure 3, grips from behind a stop surface 74 of valve seat support 1, as a result of which a shifting of valve seat support 1 with respect to valve housing 20 is prevented.

10      As a result of average distance  $d$  of material bulge 70 with respect to circumferential notch 40, after the crimping of material bulge 70, the result is an axial bracing of valve housing 20 with respect to valve seat support 1, nose-shaped projection 73 pressing valve seat support 1 axially against stop surface 45 of limit stop 44. In addition, in the crimping connection according to the present invention, sealing ring 42 is impinged upon radially, which improves the seal between valve housing 20 and valve seat support 1.

In place of the circumferential groove, notches 40 that are configured in a different manner can also be provided, in order, e.g., to facilitate a detaching of the crimping connection. In accordance with the application case, support plate 25 can be omitted, or can be replaced by lift-adjustment disk 46.

20      In Figures 4 and 5, a further exemplary embodiment of the crimping connection according to the present invention is depicted. Elements already described are furnished with identical reference numerals, as a result of which there is no need for a repetitive description about these matters.

25      After valve seat support 1 is inserted into valve housing 20 to the insertion depth prescribed by stop surface 45 of limit stop 44, a spring element 61 is introduced into an interstitial space 60 formed between valve seat support 1 and valve housing 20. Interstitial space 60, in this context, is generated by a stepped exterior contour of valve seat support 1. Spring element 61 is preferably configured as a spring ring or as a disk spring. In addition, a support ring 62 is inserted into interstitial space 60 formed between valve seat support 1 and valve housing 20, spring element 61 being prestressed by support ring 62. The prestressing of spring element 61 is preferably accomplished by the influence of a tubular prestressing tool guided by valve seat

30

support 1, the tool contacting support ring 62 at an annular surface 63, situated radially to the inside, of an end face 64 of support ring 62 facing away from spring element 61. In this manner, spring element 61 and support ring 62 are arranged as depicted in Figure 5.

5 To produce the crimping connection, a segment 65 of valve housing 20 on the side of the sealing seat is crimped in the direction of valve seat support 1, as a result of which the crimping connection is generated as depicted in Figure 5.

The crimping connection that arises is discussed in greater detail on the basis of Figure 5.

10 Spring element 61, via support ring 62, produces an axial tension between valve housing 20 and valve seat support 1. In this context, irrespective of the shape of crimped sealing-seat-side segment 65 of valve housing 20, spring element 61, as a result of support ring 62, is brought into contact with an end face 75, facing the spring element. In addition, if a support ring 62 is not used, the danger exists that in response to the crimping of sealing-seat-side segment 65 of valve housing 20, spring element 61 can be damaged or jammed.

15 In Figures 6, 7, and 8, a further exemplary embodiment of fuel injector 100 according to the present invention is depicted. In this context, Figures 6 and 7 each depict a partial axial cutaway view of the segment designated in Figure 1 as II. Figure 8 depicts the segment designated in Figure 7 as VIII.

20 In contrast to the exemplary embodiment described on the basis of Figures 4 and 5, sealing-seat-side segment 65 of valve seat 20 has a greater wall thickness. After the prestressing of spring element 61 by support ring 62, sealing-seat-side segment 65 is crimped in the radial direction using an appropriate prestressing tool. The resulting crimping connection can be produced uniformly over the entire circumference of sealing-seat-side segment 65 of valve housing 20, or, as in the depicted exemplary embodiment, it can have a plurality of crimping segments 66a through 66e, which, with respect to a valve axis 67, are arranged so as to be  
25 offset from each other circumferentially, valve housing 20 at crimping segments 66a through 66e being joined to valve seat support 1 in each case by a crimped partial connection, leaving out uncrimped segments 68a through 68d.  
30

This type of crimping connection has the advantage that the stresses arising between crimping segments 66a through 66e are reduced by uncrimped segments 68a through 68d as compared to a circumferential crimping, and cracks are avoided in sealing-seat-side segment 65 of valve housing 20.

5

The present invention is not limited to the exemplary embodiments described. In particular, fuel injector 100 can also be designed as a fuel injector 100 that opens to the outside. In addition, the described crimping connection between valve housing 20 and valve seat support 1 is also appropriate for other connections, in particular the connection between valve housing 2 and core 18. In addition, the described elements can also be arranged in a turned-away manner, in contrast to the depicted examples. In particular, spring element 61 can also be arranged on the side of stop surface 45, as a result of which spring element 61 can also be used in the embodiment described with respect to Figures 1 through 3.

10

09763665-044304  
1.0840 " 59929260

## Patent Claims

1. A fuel injector (100), in particular an injector for fuel injection systems of internal combustion engines, having a valve-closure member (7) that is actuated by a valve needle (5), the valve-closure member cooperating with a fixed valve seat surface (6) to form a sealing seat, having a connecting piece (1), and having a valve housing (20) that at least partially encloses the connecting piece (1), the valve housing being joined to the connecting piece (1) by a crimped connection, characterized in that the connecting piece (1) has at least one notch (40) and that the valve housing (20), axially stressed, is crimped into the notch (40).

2. The fuel injector as recited in Claim 1, characterized in that the notch (40) is configured as a circumferential groove (40) on the external periphery of the connecting piece (1).

3. A fuel injector, in particular an injector for fuel injection systems of internal combustion engines, having a valve-closure member (7) that is actuated by a valve needle (5), the valve-closure member cooperating with a fixed valve seat surface (6) to form a sealing seat, having a connecting piece (1) and having a valve housing (20) that at least partially encloses the connecting piece (1), the valve housing being joined to the connecting piece (1) by a crimping connection, characterized in that, for acting upon the crimping connection through an axial stressing force, a spring element (61) is provided between the valve housing (20) and the connecting piece (1).

4. The fuel injector as recited in Claim 3, characterized in that a support ring (62) is provided between the spring element (61) and a crimped valve housing segment (65, 66a - 66e).

5. The fuel injector as recited in Claim 3 or 4, characterized in that the spring element (61) is configured as a spring ring.

6. The fuel injector as recited in one of Claims 1 through 5,

characterized in that the crimping connection has a plurality of crimping segments (66a-66e), which, with regard to a valve axis (67), are arranged so as to be offset from each other circumferentially, and in which the valve housing (20) is joined to the connecting piece (1) in each case by a partial crimped connection, leaving out the uncrimped segments (68a-68d).

7. The fuel injector as recited in one of Claims 1 through 6, characterized in that a lift-adjustment disk (46) is provided between the valve housing (20) and the connecting piece (1).

8. The fuel injector as recited in one of Claims 1 through 7, characterized in that a sealing ring (42) is provided between the valve housing (20) and the connecting piece (1).

9. A method for manufacturing a fuel injector, in particular an injector for fuel injection systems of internal combustion engines, having a valve-closure member (7) that is actuated by a valve needle (5), the valve-closure member cooperating with a fixed valve seat surface (6) to form a sealing seat, having a connecting piece (1) and having a valve housing (20) that at least partially encloses the connecting piece (1), the connecting piece (1) having at least one notch (40), into which the valve housing (20) is crimped, having the following method steps:  
inserting the connecting piece (1) into the valve housing (20) up to a predetermined limit stop (44), and  
crimping a material bulge (70) into the notch (40), the material bulge having an average distance (d) with respect to the notch (40) in order to generate an axial tension between valve housing (20) and the connecting piece (1).

10. A method for manufacturing a fuel injector, in particular an injector for fuel injection systems of internal combustion engines, having a valve-closure member (7) that is actuated by a valve needle (5), the valve-closure member cooperating with a fixed valve seat surface (6) to form a sealing seat, having a connecting piece (1) and having a valve housing (20) that at least partially encloses the connecting piece (1),  
having the following method steps:  
inserting the connecting piece (1) into the valve housing (20) up to a predetermined limit stop

(44),

introducing a spring element (61) into an interstitial space (60) formed between the connecting piece (1) and the valve housing (20), and  
applying a crimping force to the spring element (61) by crimping over the valve housing (20) in the direction of the connecting piece (1) in order to generate an axial tension between the valve housing (20) and the connecting piece (1).

11. The method as recited in Claim 10,

characterized in that, once the spring element (61) is introduced, the following additional method steps are provided:

inserting a support ring (62) into the interstitial space (60) formed, after the joining, between the connecting piece (1) and the valve housing (20).

12. The method as recited in Claim 10 or 11,

characterized in that the spring element (61) is prestressed before the crimping by the action of a tubular prestressing tool guided about the connecting piece (1).

13. The method as recited in one of Claims 9 through 12,

characterized in that an axial insertion depth of the connecting piece (1) into the valve housing (20) is set by least one lift-adjustment disk (46).

## Abstract

A fuel injector (100), in particular an injector for fuel injection systems of internal combustion engines, has a valve-closure member (7) that is actuated by a valve needle (5), the valve-closure member cooperating with a valve seat surface (6) provided on a valve seat support (1) to form a sealing seat, and a valve housing (20) partially surrounding the valve seat support (1), the valve housing being joined to the valve seat support (1) by a crimping connection. In this context, the valve seat support (1), axially stressed, is crimped to the valve housing (20).

(Figure 1)



1/3

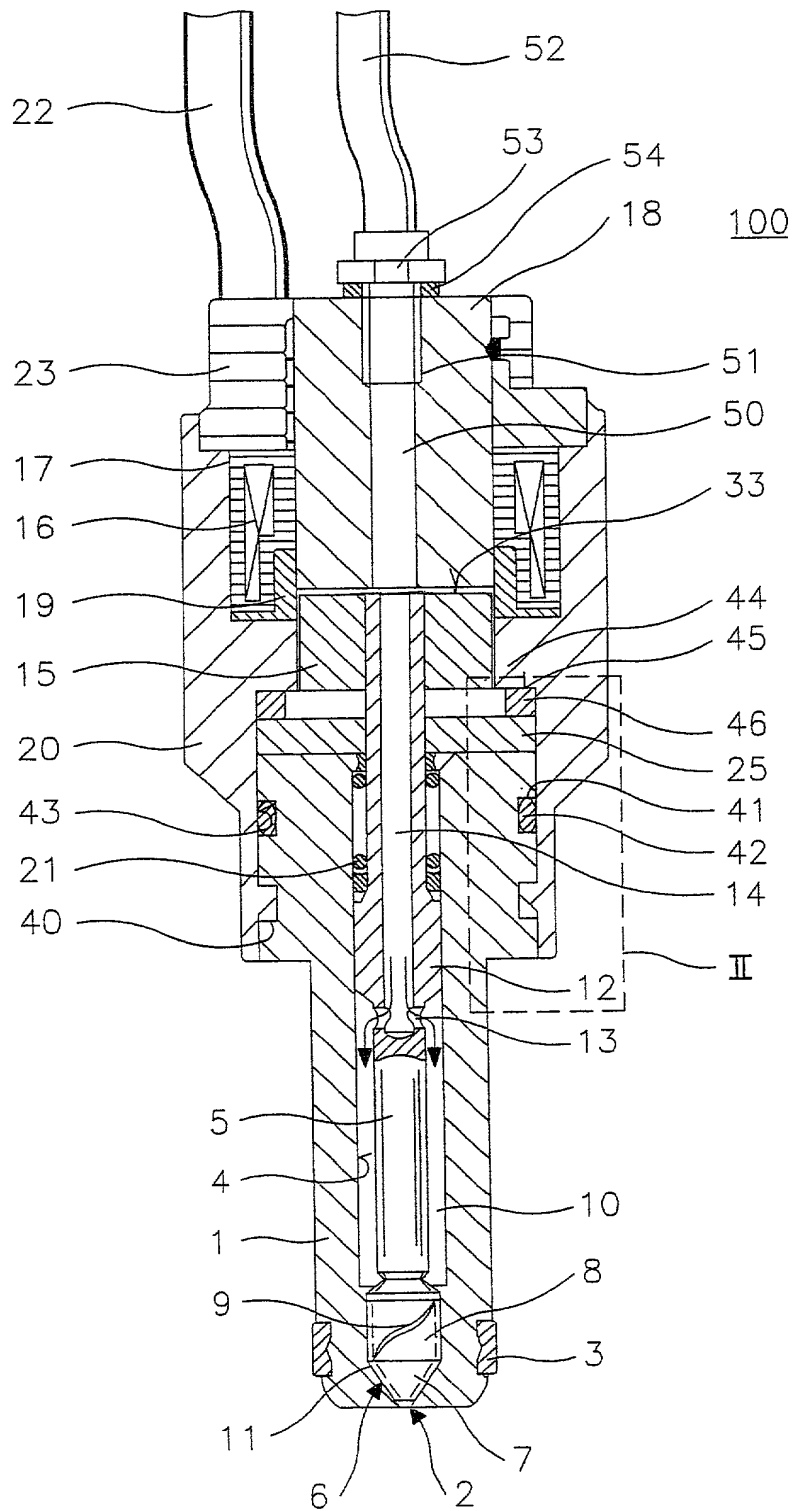


Fig. 1

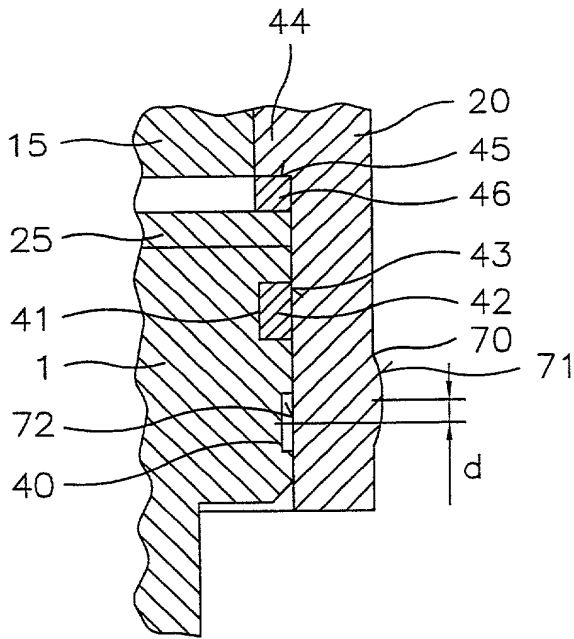


Fig. 2

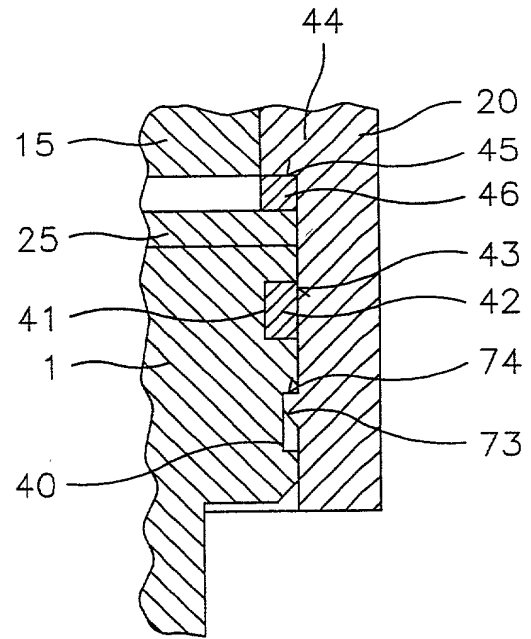


Fig. 3

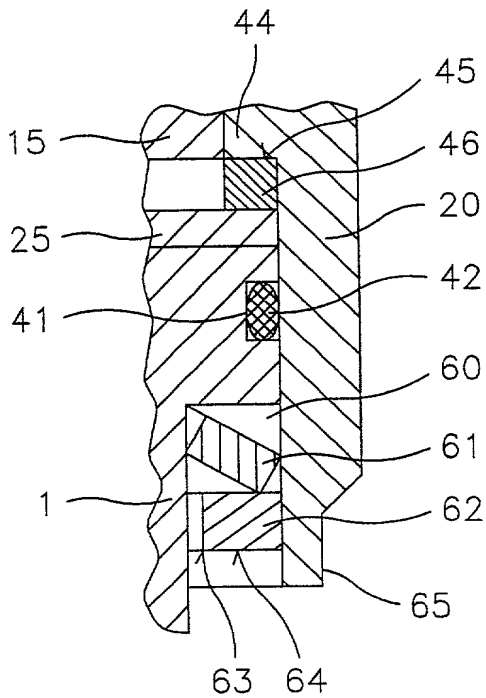


Fig. 4

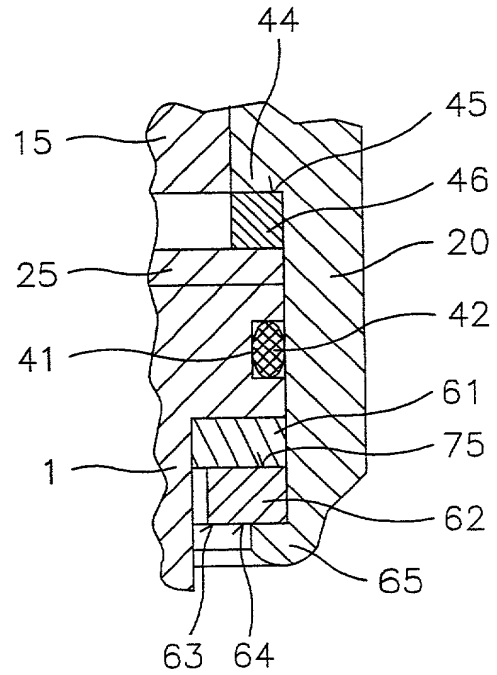


Fig. 5

3/3

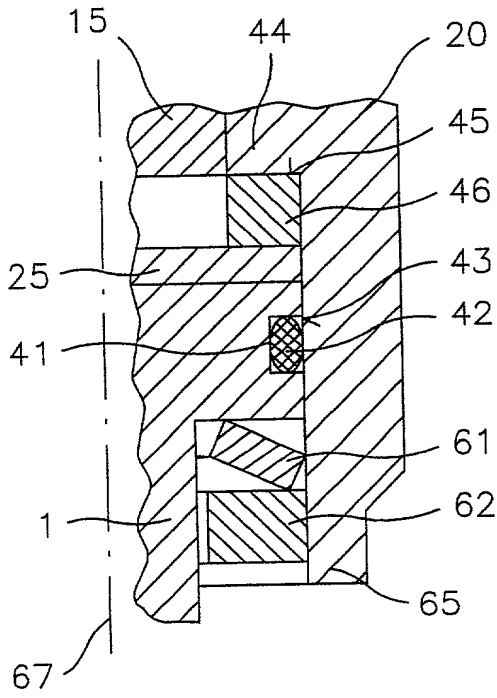


Fig. 6

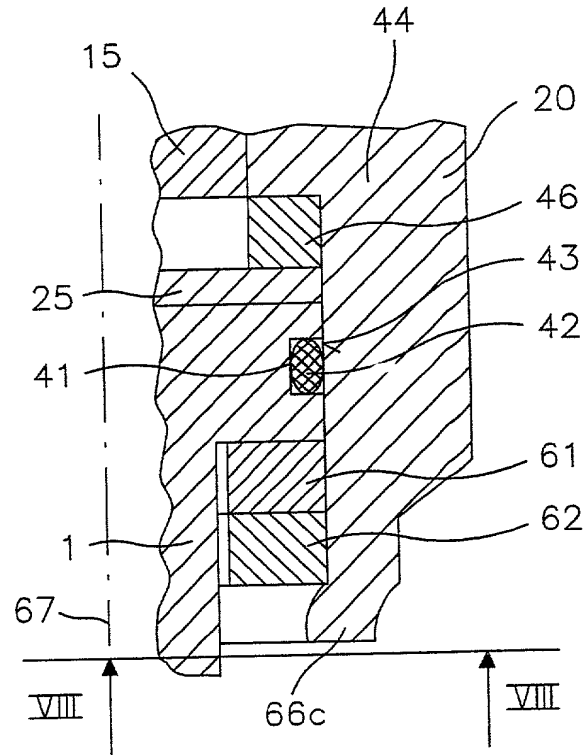


Fig. 7

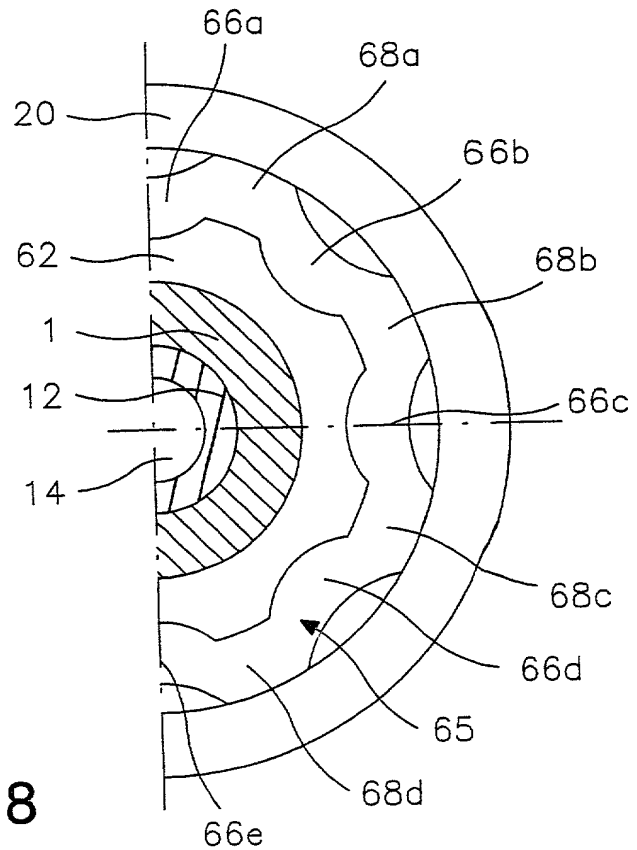


Fig. 8

**DECLARATION AND POWER OF ATTORNEY**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled **A FUEL INJECTOR AND A METHOD FOR MANUFACTURING IT**, the specification of which was filed as International Application No. PCT/DE00/00487 on February 22, 2000.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application(s) for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

**PRIOR FOREIGN APPLICATION(S)**

Number	Country Filed	Day/Month/Year	Priority Claimed Under 35 USC 119
199 25 984.4	Fed. Rep. of Germany	08 June 1999	Yes

EL394612334US  
84302703172

And I hereby appoint Richard L. Mayer (Reg. No. 22,490) and Gerard A. Messina (Reg. No. 35,952) my attorneys with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

②

Please address all communications regarding this application to:

KENYON & KENYON  
One Broadway  
New York, New York 10004

Please direct all telephone calls to Richard L. Mayer at (212) 425-7200.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful and false statements may jeopardize the validity of the application or any patent issued thereon.

Inventor: Hans WALDEMAR

Inventor's Signature: \_\_\_\_\_

*Waldemar Hans*

Date: \_\_\_\_\_

*19.02.2001*

Residence: Adam-Krafft-Str. 7 F  
96050 Bamberg  
Federal Republic of Germany

*DE*

Citizenship: Federal Republic of Germany

Post Office Address: Same as above.

0976265-044801

Inventor: Johann BAYER

2.00  
Inventor's Signature: Johann Bayer

Date: 28.02.2001

Residence: Zur Point 6  
96129 Strullendorf  
Federal Republic of Germany

DEX

Citizenship: Federal Republic of Germany

Post Office Address: Same as above.

09762665-041301